



LINEAR LOW PROFILE

LG SERIES



Project: _____

Date: _____

Comments: _____

Product Benefits:

- Over 35% thinner profile than traditional vapor tight product
- The thinnest, most efficacious product family in DLC parking garage category
- Wide light throw - best in class "profile to distribution ratio"
- Vandal resistant with style
- Robust anodized construction can handle the harshest environments
- Impact-resistant acrylic lens
- Developed in the USA. Manufactured & Assembled in the USA of U.S. and imported parts
- 12 guage thru-wired for long end to end mounting


Performance & Specifications:

Color Temperature 4000K, 5000K
 CRI 84 min
 Input Voltage 120-277VAC, 347VAC
 Ingress Protection Rating IP65
 Warranty 5 Years
 Projected L70* min 200,000 hrs
 Dimming 0-10 Volts

*L70 TM-21 projection calculated at 25 °C.

Optic	Product	Length (in.)	Input Power (W)	Max Lumens (nominal)	Efficacy
High Beam, Clear Lens	LG24	25	18.7	2200	>111
	LG36	33.6	37.5	4400	
	LG48	44.5	58	6700	
	LG55	55.7	76	8800	
High Beam, Diffused Lens	LG24	25	18.7	2100	
	LG36	33.6	37.5	4200	
	LG48	44.5	58	6500	
	LG55	55.7	76	8400	
Specific Lumen Outputs					
	LG36-2700L	33.6	22.1	2700	122.6
	LG48-3040L	44.5	24	3040	127

Measurements:

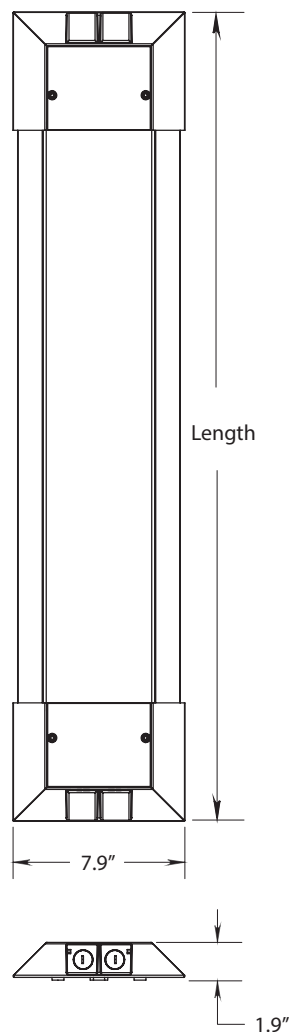

Additional Ordering Options:

- Mounting styles - Surface, Pendant and Suspended 4 ft standard
- Integrated Occupancy and Daylight & Harvesting Sensor - Field Programmable
- Battery backup

Qualifications:





LINEAR LOW PROFILE

LG SERIES


LG24 PHOTOMETRIC DETAILS (REPRESENTATIVE)

High Beam, Clear Lens

Intensity Summary (cd)

Gamma	C-Plane					Flux (lm)
	C0	C22.5	C45	C67.5	C90	
0.0	759	759	759	759	759	
5.0	722	726	738	749	755	69
10.0	631	644	681	726	747	
15.0	552	563	606	687	732	176
20.0	497	506	542	635	711	
25.0	477	474	490	577	685	245
30.0	475	466	450	518	651	
35.0	479	464	432	464	613	299
40.0	493	469	419	412	569	
45.0	522	485	408	362	519	344
50.0	564	516	403	324	463	
55.0	591	545	408	290	400	384
60.0	591	550	419	256	332	
65.0	555	525	411	224	260	378
70.0	450	440	371	197	184	
75.0	299	295	275	167	108	241
80.0	137	139	142	105	45	
85.0	13	15	15	25	8	34
90.0	1	0	1	0	0	

Polar Plane Symmetry

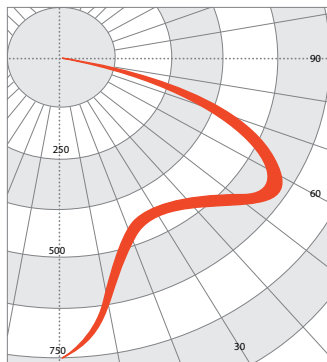

Zonal Flux and Percentages

Zone	Flux (lm)	% Lamp	% Luminaire
0-30	490	N/A	22.6
0-40	788	N/A	36.3
0-60	1516	N/A	69.9
0-90	2169	N/A	100.0
40-90	1381	N/A	63.7
60-90	653	N/A	30.1
90-180	0	N/A	0.0
0-180	2169	N/A	100.0


LG24 PHOTOMETRIC DETAILS (REPRESENTATIVE)

High Beam, Diffused Lens

Intensity Summary (cd)

Gamma	C-Plane					Flux (lm)
	C0	C22.5	C45	C67.5	C90	
0.0	777	777	777	777	777	
5.0	755	757	764	770	773	69
10.0	701	708	728	751	762	
15.0	639	648	678	720	742	176
20.0	590	597	624	680	715	
25.0	563	562	576	633	680	245
30.0	552	544	537	583	639	
35.0	552	535	506	530	589	299
40.0	553	531	480	477	532	
45.0	546	520	455	425	471	344
50.0	524	496	425	374	407	
55.0	486	459	387	324	343	384
60.0	432	408	341	273	282	
65.0	365	345	287	222	223	378
70.0	285	271	226	170	165	
75.0	198	189	158	117	110	241
80.0	113	108	90	65	60	
85.0	40	38	32	22	19	34
90.0	5	5	3	2	0	

Polar Plane Symmetry

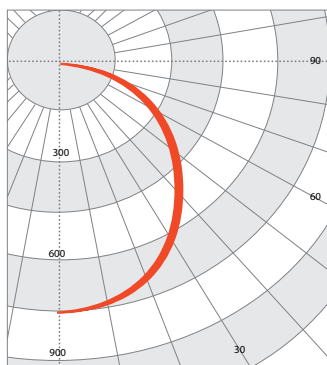

Zonal Flux and Percentages

Zone	Flux (lm)	% Lamp	% Luminaire
0-30	541	N/A	25.9
0-40	876	N/A	42.0
0-60	1598	N/A	46.5
0-90	2088	N/A	99.8
40-90	1206	N/A	57.8
60-90	485	N/A	23.2
90-180	5	N/A	0.2
0-180	2088	N/A	100.0




LINEAR LOW PROFILE

LG SERIES


MOUNTING OPTIONS: 4 mounting styles . . . to start from. All the mounting options you need to be the perfect fit for the project.



END TO END



SUSPENDED



SINGLE PENDANT



DOUBLE PENDANT

CONSTRUCTION: The LG series product line is constructed with an anodized aluminum, low profile body to not only withstand the toughest weather conditions, but also the toughest neighborhoods.



Raffino can configure products to fit your customer's specific needs. Contact us for more details!



Search DLC QLP as "LG48-XXXXL". Use similar search for alternate product sizes.



LG24

APPLICATIONS

Lumen output	Wall Wash	Stairwell	Garage	Canopy	Marine	Cold Storage
LG24	●	●			●	
LG36	●	●	●		●	●
LG48		●	●	●	●	●
LG55				●		●

Product Size	Lumen Output	Color Temp.	Mounting Options	Beam Spread	Lens Type	Power Options	Sensory Option	Packaging
LG24	2200L 2200 Lumens	40K-4000K 50K-5000K	N -Standard Troffer UP -Universal adapter plate S1 - Suspension (2 loop) S2 - Suspension (2 loop and power) S3 - Suspension - double j-box with covers P1 -Single Pendant P2 -Double Pendant	H -High Beam L -Low Beam	C -Clear D -Diffuse	N -None (standard) B -Emergency Battery Pack 3 -347 V	N -None SE -Occupancy only SED1 -Daylight harvesting & occupancy	D -Distributor Pack B -Bulk Pack* *Minimum Orders: LG24 - 43 qty LG36 - 43 qty LG48 - 34 qty LG55 - 25 qty
LG36	4400L 4400 Lumens							
LG48	6700L-6700 Lumens							
LG55	8800-8800 Lumens							

Order Form									Qty
LG	_____ L*	___ K							
	_____ L*	___ K							
	_____ L*	___ K							

*Write-in custom lumen value if required, must be less than max lumens / size

EXAMPLE ORDER: LG48-6700L-50K-NHC-N-SE-D